

SOLUTIONS FOR BUNDLING

N3400C AUTOMATIC STRAPPING MACHINE

Introducing the N3400C arch machine – Your Ultimate Solution for Efficient Strapping! Enjoy uninterrupted performance with 55 cycles per minute, ensuring rapid and precise strapping for various applications, including boxes, lumber, and print media. The N3400C has been upgraded with a wear-free strap frame featuring stainless steel guides and an operation terminal equipped with soft buttons, making it intuitive and easy to operate. Bid farewell to manual hassles as the automatic start feature streamlines your strapping process. This innovative solution ensures not only hassle-free operation but also durability, making the N3400C the go-to choice for efficient and reliable strapping applications. Moreover, the N3400C requires less maintenance with its brushless direct drive motors, providing a cost-effective and user-friendly strapping solution.

ENERGY SAVING MOTORS!

The N3400C is Ideal for



FEATURES

- Up to 55 cycles per minute, depending on tension settings and package size
- Automatic strap feed
- Automatic cycle start by tabletop sensor
- Wear-free, Energy Saving 24VDC direct-drive motors
- Strap width 5-12 mm
- Footbar at operator side Adjustable torque controlled strap tension
- Wear-free strap frame with stainless steel guides
- Strap end detection system with automatic discharge of remaining strap
- MFT 'Mono-Frame-Technology'
- ASLF 'Anti-Strap-Loss-Function' constant strap control
- External dispenser
- Power connection at the top of the arch or bottom of the machine
- Exclusive eject function avoids strap jam
- Table height steplessly adjustable
- Operation terminal with soft button
- Hinged removable tabletops




INNOVATIVE, RELIABLE, ENERGY-SAVING

N3400C EQUIPMENT SPECS

SPECIFICATIONS

Cycle Rate	Up to 55 cycles per minute
Cycle Initiation	Photo eye sensor or footbar
Package Weight	386 lbs. (175kg)**
Package Size	Min. 1.37" H x 2.5" W (Max. Governed by Arch)
Strap Tension	Adjustable Electronic Control
Strap Size	1/4" - 1/2" (5mm-12mm)
Standard Arch Size	23" x 23"
Seal Head Location	Bottom
Sealing Method	Heat Seal
Mobility	3" Casters
Dispenser	Externally Located 8" or 9" I.D./ 8" Face/ 18" O.D.
Power	110V Single Phase

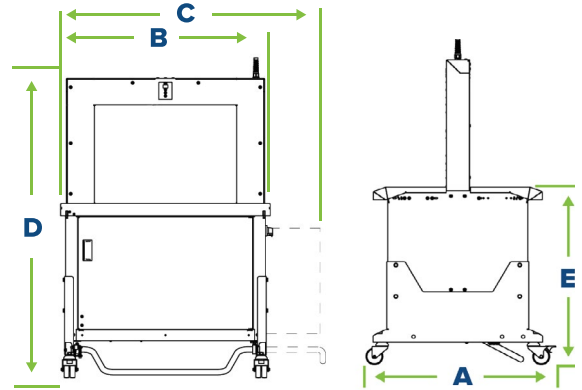

Options:

AUTOMATIC ULTRASONIC STRAP TENSIONING
EXTERNAL DISPENSER



All Metal Strap
Drive Rollers



DAT (Direct Access
Technology)



HOT Knife
Sealing Technology



Fewer Moving
Wear Parts

Additional Models Available:



N3400CM



N3400CB

Overall Width: (A)

32.5"
(828mm)

Overall Length: (B)

37.6"
(956mm)*

Overall Length: (C) (with external dispenser)

47.6"
(1210mm)*

Overall Height: (D)

61.6 - 66.3"
(1565 - 1685mm)*

Table Height:

31.3 - 35.8"
(795 - 910mm)

ABOUT GREENBRIDGE

Founded in 1974 as Polychem, we rebranded in April 2021 as Greenbridge to reflect our commitment to providing proactive solutions to customers across North America seeking to achieve more sustainable, high-performing operations. Our early reputation was based on our quality polyester, polypropylene and cord strapping. Today, years of growth and strategic acquisitions have made Greenbridge a leading end-of-line packaging supplier, with integrated solutions that encompass tools, equipment, systems, and services that help tame the most challenging supply chains.

Greenbridge is committed to the safety of our team, the quality of our products and services, investing in continuous improvement, advancing the circular economy, and fostering sustainable customer success.

It's easy to find a supplier to sell you equipment.

It's another thing to find one who understands your business.

Talk to Greenbridge.

GREENBRIDGE
YOUR BRIDGE TO BUNDLED